
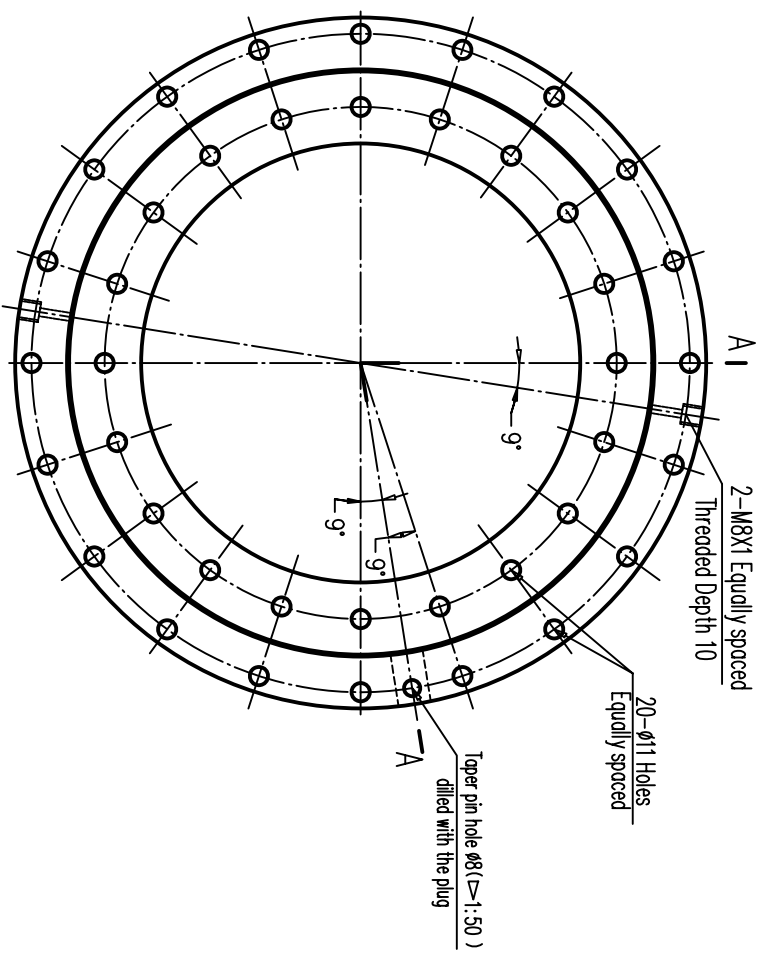


- 1. Axial clearance: 0.05~0.10mm
- 2. Static load ratings: $C_{00}=470KN$

modul	m	3
number of teeth	Z	59
addendum coefficient	X	0
accuracy class	998cJ-GB10095	

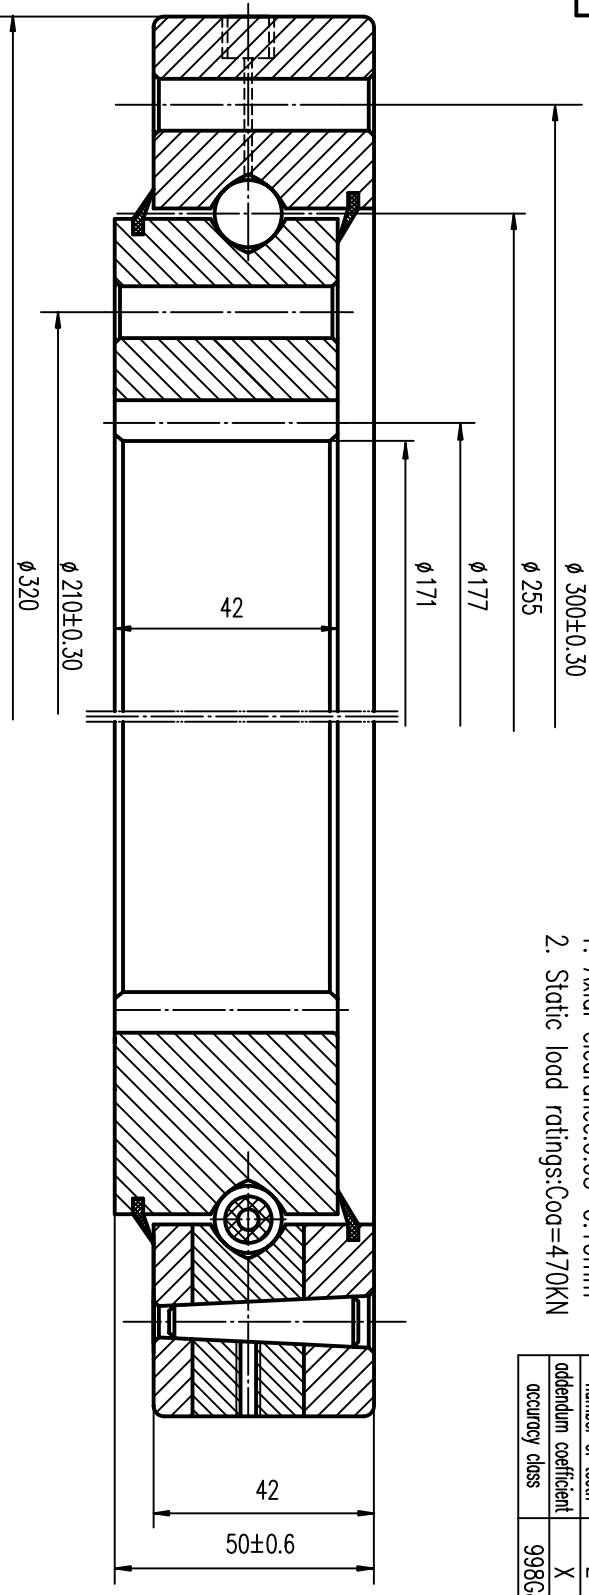

- Note:
- 1. Material tempered and quenched hardness: HB229~269;
 - 2. Raceway case harder hardness HRC55~60, at hardness gap on outer race on which less than 30mm.
 - 3. Ball and separator alternat placed;
 - 4. Grease: Alvania EP2 or Equivalent
 - 5. Rubber seal must be installed with permadband or equivalent, clean seal groove thoroughly with alcohol before installation;

Mark	Revise No.	Sign	Date	4-point-contact ball slewing bearing	SIR20/255
Designer					
Proofread					
Auditing					
Confirm					
Material : 42CrMo				Design Mark	Weight
				Total 1 Page	No. 1 Page

