



G232B two post hydraulic lift

Features:

Driven by double hydraulic cylinders, chain-type elevating system

The stabilization system of steel wire rope, it ascends and descends smoothly

Multi-voltage power supply is available for convenient use

Two sides manual safety lock release system

Asymmetric design, make the auto door can be opened with narrow width between pillars

Economical but reliable cast-iron cover motor, Optional aluminum motor

Optional imported pumping device



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86-13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	7714lbs/3500kg
Lifting height	71"/1800mm
Lifting time	50seconds
Overall height	111"/2816mm
Overall width	138"/3500mm
Width between columns	110"/2800mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	1417lbs/643kg



G232D Two post lift(strong base)

Features:

Extra strong base frame, added strength and stability

Driven by double hydraulic cylinders, chain-type elevating system

The stabilization system of steel wire rope, it ascends and descends smoothly

Multi-voltage power supply is available for convenient use

Two sides manual safety lock release system

Asymmetric design, make the auto door can be opened with narrow width between pillars

Economical but reliable cast-iron cover motor, Optional aluminum motor



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86-13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Optional imported pumping device

Technical data

Lifting capacity	7714lbs/3500kg
Lifting height	71"/1800mm
Lifting time	50seconds
Overall height	112"/2856mm
Overall width	138"/3500mm
Width between columns	109"/2760mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	1483lbs/673kg



G235D two post gantry lift

Features:

Clear floor design makes under-vehicle service more convenient

Two sides manual safety lock release system

Multi-voltage power supply is available for convenient use

Japanese and American hydraulic seals ensured the tightness of oil cylinder

Asymmetric design, the width of 2850mm allows much wider vehicles

Economical but reliable cast-iron cover motor, Optional aluminum motor

Optional imported pumping device



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86-13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	7714lbs/3500kg
Lifting height	71" / 1800mm
Lifting time	50seconds
Overall height	146" / 3716mm
Overall width	138" / 3500mm
Width between columns	112" / 2850mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	1439lbs/653kg



G245M two post gantry lift

Features:

Clear floor design makes under-vehicle service more convenient

Single-side safety release system, and dual safety design

Multi-voltage power supply is available for convenient use

Japanese and American hydraulic seals ensured the tightness of oil cylinder

Asymmetric design, the width of 3000mm allows much wider vehicles

Economical but reliable cast-iron cover motor, Optional aluminum motor

Optional imported pumping device



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City


Tel:86-13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	9918lbs/4500kg
Lifting height	71" / 1800mm
Lifting time	50seconds
Overall height	146" / 3716mm
Overall width	138" / 3500mm
Width between columns	112" / 2850mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	1439lbs/653kg

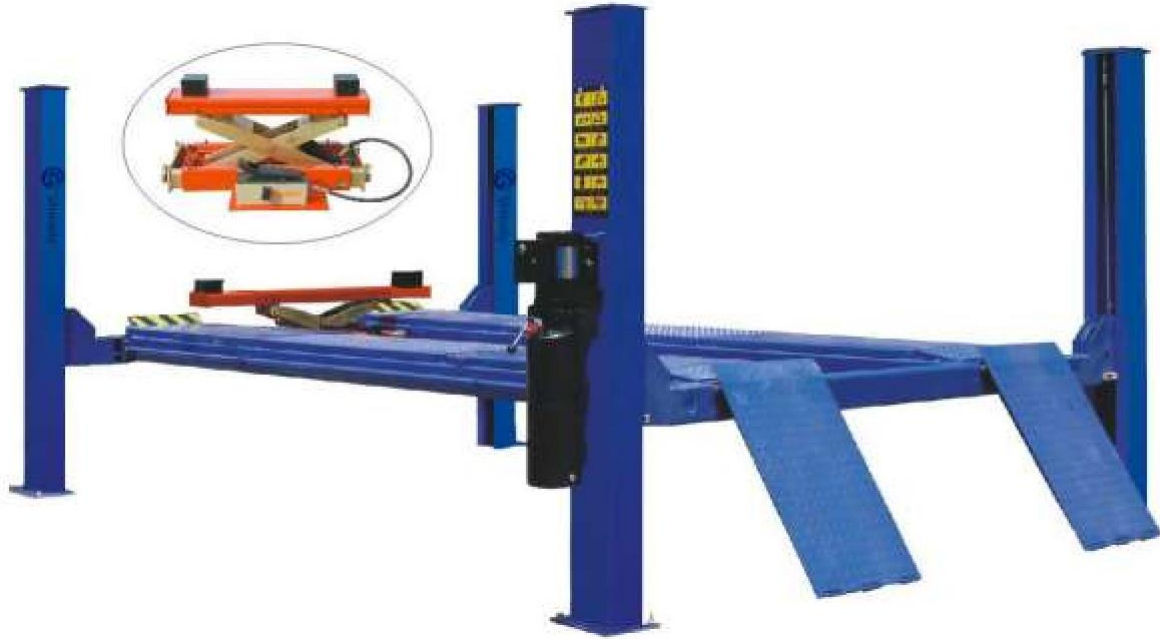

G440D Four post lift(for four wheel alignment)

Features:

Driven by hydraulic cylinder in stable lifting and lowering, it is used for lifting of various small and medium-sized vehicles **with total loading capacity for 4 tons,**

5.5 tons ,8tons and up to 20 tons in garage and workshop

Offering full range mechanical safety protection by using the safety latches

Connected by four steel cables; forced synchronized movement of the lift in order to effectively prevent the sloping of the vehicles

Adjustable distance between runways to accommodate different wheel track

Equipped with secondary lifting jack, two adjustable turntable positions and sideslip, suitable for wheel alignment

Optional electric jack, pneumatic jack or manual jack

Optional imported pumping device



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	8816lbs/4000kg
Lifting height	65" / 1650mm
Lifting time	50seconds
Overall height	80" / 2020mm
Overall width	124" / 3140mm
Overall length	183" / 4650mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	2645lbs/1200kg
	g



G440C Four post lift

Features:

Driven by hydraulic cylinder in stable lifting and lowering, it is used for lifting of various small and medium-sized vehicles **with total loading capacity for 4 tons,**

5.5 tons ,8tons and up to 20 tons in garage and workshop

Offering full range mechanical safety protection by using the safety latches

Connected by four steel cables; forced synchronized movement of the lift in order to effectively prevent the sloping of the vehicles

Adjustable distance between runways to accommodate different wheel track

Equipped with secondary lifting trolley guide rail



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	8816lbs/4000kg
Lifting height	65" / 1650mm
Lifting time	50seconds
Overall height	80" / 2020mm
Overall width	124" / 3140mm
Overall length	183" / 4650mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	2645lbs/1200kg
	g



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel: 86 13112271590 Fax: 86-20-66293300

E-mail: niki@gz-btb.com

Website: www.sycartools.com



G440A Four post lift

Features:

Driven by hydraulic cylinder in stable lifting and lowering, it is used for lifting of various small and medium-sized vehicles **with total weight for 4tons, 5.5tons, 8tons and up to 20tons in garage and workshop**

Offering full-range mechanical safety protection by using the safety latches

Connected by four steel cables; forced synchronized movement of the lift in order to effectively prevent the sloping of the vehicles

Adjustable distance between runways to accommodate different wheel tracks

Equipped with secondary lifting trolley guide rail

Optional imported pumping device



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	8816lbs/4000kg
Lifting height	65" / 1650mm
Lifting time	50seconds
Overall height	80" / 2020mm
Overall width	124" / 3140mm
Overall length	183" / 4650mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	2645lbs/1200kg
	g



GQJ350D Alignment scissor lift

Features:

In-ground installation

Ideal choice for alignment and chassis checking and vehicle maintenance use

Adjustable turntable position adapts to more types of vehicle

Its central jack, with a maximum of 500mm lifting height, is extensible for longer vehicles

Aluminum motor prevents overheated

The mechanical safety lock automatically engaged when rising

Pneumatic release system decreases noise emitted during service work

Technical data

Lifting capacity	77
Lifting height	79"/2000mm
Secondary lifting height	20" / 500mm
Min Height	13" / 330mm



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Overall length	165" / 4200mm
Platform width	24" / 620mm
Width between two platforms	32" / 800mm
Air source pressure	5-6kg/Cm ²
Lifting time for large scissor	30seconds
Lifting time for jack	20seconds
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	3760lbs/1706kg



GQJ350A Professional alignment scissor lift

Features:

Luxurious scissor wide-platform structure with super synchronization

Level can be well adjusted to meet the need for wheel alignment

Device perform stable and reliable work is relayed on imported hydraulic, pneumatic and electrical components

The pneumatic double-teeth self-locking system and anti-explosion pipe structure will automatically open when lowering , which ensure the safety of the device.

Ingenious and unique sliding system and closed platform, also don't need ground pits.

With trolley guide rail and can optional add the second lifting jack

The position of the front wheel turning table (optional part) is adjustable and suitable for various type of automobile



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	7714lbs/3500kg
Lifting height	79"/2000mm
Secondary lifting height	20" / 500mm
Min Height	13" / 330mm
Overall length	165" / 4200mm
Platform width	24" / 620mm
Width between two platforms	32" / 800mm
Air source pressure	5-6kg/Cm ²
Lifting time for large scissor	30seconds
Lifting time for jack	20seconds
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Net weight	3760lbs/1706kg



GQZJ300B Scissor lift

The full rise small scissor lift is applicable to lifting, detecting, repair and maintenance of various cars and other small vehicles

This lift adopts hidden flat-plate structure, which only takes up little room. And it is equipped with imported Italian hydraulic pump station

It is with mechanical dual-gear safety-claw lock and hydraulic lock bringing about double safety, which will automatically open when lowering

It is of good quality, safe and reliable. It will run synchronously and smoothly, more convenient for both tire changing and chassis maintenance

It implements hidden-underground design and is equipped with anti foot-crush alarm device

It functions with 24V electric control box and 24V limit switch

It uses pneumatic-driven lock device, anti-crack valve and imported Italian ball valve as its standard components

The elongated track device can make the lift available for long vehicles



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	6612Ibs/3000kg
Lifting height	79" / 2000mm
Min height	13" / 340mm
Platform length	60" / 1530mm
Extensible length	9" / 216mm
Platform width	22" / 550mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Lifting time	40seconds



GQZJ300 Scissor lift

Features:

Scissor hidden ultra-thin flat-panel structure, to facilitate the demolition of the tire and chassis overhaul

Initial height of 110mm, no need to dig trough the installation

Italy original hydraulic pumps and valves, while imports of electrical components

With a hydraulic valve interlocking and explosion-proof device, run smoothly and reliably

Good synchronization



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data

Lifting capacity	6612Ibs/3000kg
Lifting height	72" / 1830mm
Min height	4" / 105mm
Overall length	74" / 1870mm
Platform length	57" / 1450mm
Platform width	25" / 630mm
Width between two platforms	30" / 750mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Lifting time	40seconds



GL 2.7 moveable scissor lift

Features:

Good choice for body shop or low ceiling shop

Manual safety lock release system

Portable lift, easy moving

Flexible lifting pads suitable for different height of vehicles

Technical data

Lifting capacity	5950Ibs/2700kg
Max lifting height	39" / 1000mm
Min height	5" / 126mm
Overall length	79" / 2000mm
Overall width	68" / 1730mm
Motor voltage	220V or 380V



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Lifting time	20seconds
Net weight	661lbs/300kg



GL 2.8 Low rise lift

Features:

The min height is 100mm, basement is not needed

Small volume, disassemble the tire and repair the under pan

Light weight, move expediently

Safety locking apparatus is easy to operate ,safe and reliable

Technical data

Lifting capacity	6171lbs/2800kg
Lifting height	24" / 620mm
Min height	4" / 100mm
Overall width	71" / 1800mm
Overall length	79" / 2000mm



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Lifting time	25seconds
Net weight	829lbs/376kg



GQTJ320 Four post parking lift

Features:

Ideal choice for simple vehicle services and vehicle parking in families or commercial parking lots

Single point lock release, simple and convenient

Optional mobile kit can make the whole lift move easily in your garage

Low profile design for easier driving-on

The mechanical safety lock automatically engaged when rising

Aluminum motor, low control voltage(24V)guards against unexpected hurt or injury



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Technical data:

Lifting capacity	6612Ibs/3000kg
Max lifting height	73" / 1860mm
Min height	5" / 125mm
Post height	82" / 2081mm
Runway width	19" / 475mm
Ramp length	37" / 950mm
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Lifting time	50seconds



GQM350 Motorcycle lifting platform

Features:

Ideal choice for quick motorcycle tire service and body related services

convenient and safe for operation

Technical data:

Lifting capacity	771lbs/350kg
------------------	--------------



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Lifting height	28" / 700mm
Min height	6" / 140mm
Mesa size	2000mm*980m m
Motor voltage	220V or 380V
Frequency	50Hz or 60Hz
Phase	1ph or 3ph
Lifting time	50seconds



Two post ascending lift

Two post hydraulic lifting platform is for transporting goods

Operation of its in hydraulic system

Auto Opening and Closing of inlet & Out Let.

Auto Regulation Between Top & bottom .



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel:86 13112271590 Fax:86-20-66293300

E-mail: niki@gz-btb.com

Websit: www.sycartools.com

Easy to use for any types vehicles(goods)

Easy operation for users' convenience

Installation for any place with convenient way



Scissor ascending lift

Scissor ascending lift is a kind of special hydraulic lifting platform for transporting vehicles and goods between buildings

It is mainly used for lifting stage and transporting goods up and down in all work layers

Auto lifting in solid garage and underground garage. This production keeps control with PLC

Hydraulic pressure system is equipped with anti-dropping, overloading safety protector Each floor and lifting platform is set operation button to realize multi-point control

We can tailor the products to meet our customers demands.



Four post ascending lift

Four post ascending lift is a kind of special hydraulic lifting platform for transporting vehicles

It is mainly used for transporting vehicles up and down in all work layers



Guangzhou Shinely Import&Export Trade Co., Ltd

Add: Room 412, Floor 4, Building A, No. 9, Huangbian North Road, Jiahe Street, Baiyun

District, Guangzhou City

Tel: 86-20-66293350 Fax: 86-20-66293300

E-mail: akina@gz-btb.com

Website: www.sycartools.com

Auto lifting in solid garage and underground garage. This production keeps control with PLC

Hydraulic pressure system is equipped with anti-dropping, overloading safety protector Each floor and lifting platform is set operation button to realize multi-point control

We can tailor the products to meet our customers' demands

Two post and four ascending lift is a kind of special hydraulic lifting platform for transporting vehicles and goods between buildings

It is mainly used for lifting stage and transporting goods up and down in all work layers

Auto lifting in solid garage and underground garage. This production keeps control with PLC

Hydraulic pressure system is equipped with anti-dropping, overloading safety protector Each floor and lifting platform is set operation button to realize multi-point control

We can tailor the products to meet our customers demands.