

Guangdong KITO Ceramics Co., Ltd

Tel: +86-757-82533646

Fax: +86-757-82533866

E-mail: [export@kito.cn](mailto:export@kito.cn)

Website: [www.kito.cn](http://www.kito.cn)

B1, Ceramics International Trading Center ,  
Jihua Western Rd, Foshan, Guangdong, P.R.C  
Post code: 528061

**KITO**

KITO Beyond Your Imagination.

**2015**  
NEW  
COLLECTION



# KITO

## **Leading Glazed Tile Supplier**

*A top player specialized in top-grade glaze porcelain tiles production with more than 39 years experience.*

## **R & D Center**

*More than 120 engineers and professors,  
43 types of technology and product patents.*

## **TQC System**

*In accordance with CE(EN14411:2012) standard.*

## **Products range**

*Size: 100x100 mm to 600x1200 mm.*

*Thickness: 4.8mm to 20mm*

*Surface: full polished, lappato, matt and rough finish.*

*Technique: silk printing, roto printing, inkjet printing*



## CONTENTS

CEMENT — 01

WHITE MARBLE TILES — 03

SUGAR EFFECT — 05

TIMBER — 07

MARBLE TILES — 09

SPANISH STONE — 11

PIETRA — 12



## CEMENT


Surface: matt  
Available size: 1200×600×12,5,  
800×800×11,5, 800×800×20, 600×600×10, 600×600×20  
Modulus of Rupture: Minimum  $\geq 35\text{N/mm}^2$   
Static Coefficient of Friction: Dry:0,95 Wet:0,73  
Water Absorption:  $\leq 0,5\%$   
Breaking Strength:  $\geq 1300\text{N}$



CITY  
4 Colour: Off white, Beige, Grey, Black



WEATHERED CONCRETE  
3 Color: Off white, Grey, Black



CONCRETE  
4 Color: Off white, Beige, Grey, Black





## WHITE MARBLE TILES

Color: White

2 surface: matt, polished


Available size: 800 × 800 × 11,5, 600 × 600 × 10

Modulus of Rupture: Minimum ≥ 35N/mm<sup>2</sup>

Static Coefficient of Friction: Dry: 0,95 Wet: 0,73

Water Absorption: ≤ 0,5%

Breaking Strength: ≥ 1300N



K0605020YAF



K0605019YAF









Porcelain DAP  
with Decorative concrete

## SUGAR EFFECT

2 Color: White, Beige  
Surface: Ipatto  
Available size: 800 × 800 × 11,5, 600 × 600 × 10  
Modulus of Rupture: Minimum  $\geq 35 \text{ N/mm}^2$   
Static Coefficient of Friction: Dry: 0,95 Wet: 0,73  
Water Absorption:  $\leq 0,5\%$   
Breaking Strength:  $\geq 1300 \text{ N}$



K0803335DAP



K0803337DAP

## DECOR




SW200-1A



SW200-2A



SW200-3A



SW200-4A




SW200-5A



SW200-6A



SW200-7A



3337DH



## TIMBER

3 Color: Light Grey, Beige, Brown  
Surface: matt  
Available size: 1200×200×12,5, 900×600×11,5, 900×150×11,5  
Modulus of Rupture: Minimum ≥35N/mm<sup>2</sup>  
Static Coefficient of Friction: Dry:0,95 Wet:0,73  
Water Absorption: ≤0,5%  
Breaking Strength: ≥1300N

SILVER WOOD



K1223230MA 1200×200×12,5

OAK



K122885MA 1200×200×12,5

NATURE WOOD



K122886MA 1200×200×12,5

WILD WARM WOOD



K122880MA 1200×200×12,5

BIRCH FOREST



K1223225MA 1200×200×12,5

SLOOPHOUT



K1223227MA 1200×200×12,5

## DECOR

3 different patterns



K122880MH 1200×200×12,5

3 different patterns




K1223225MH 1200×200×12,5

3 different patterns



K1223227MH 1200×200×12,5



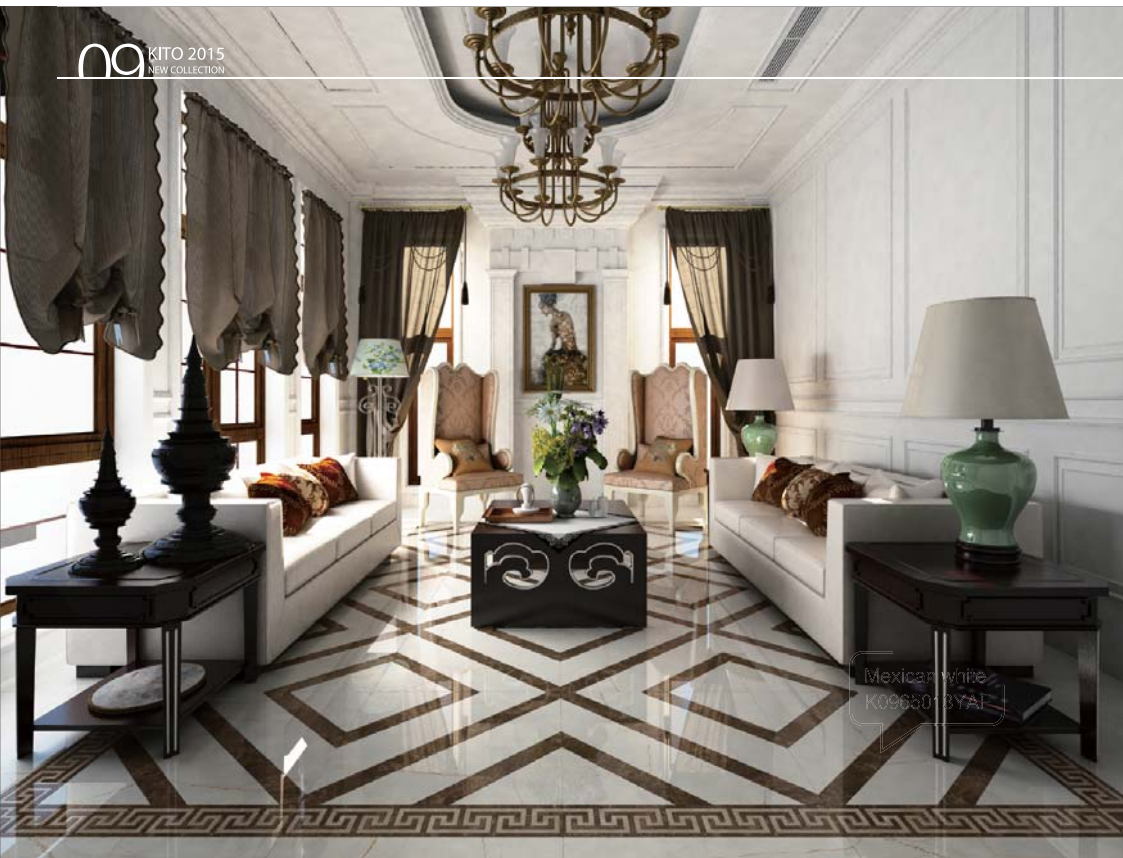

## MARBLE TILES


3 Color: White, Light Grey, Beige  
Surface: Full polished  
Available size: 900 × 600 × 11,5, 600 × 600 × 10  
Modulus of Rupture: Minimum  $\geq 35\text{N/mm}^2$   
Static Coefficient of Friction: Dry: 0,95 Wet: 0,73  
Water Absorption:  $\leq 0,5\%$   
Breaking Strength:  $\geq 1300\text{N}$

SIMMI




K0965001YAF

ATHENS WOODEN



K0965002YAF

MEXICAN WHITE



K0965013YAF

ITALY WOODEN



K0965014YAF

ARMAN STONE



K0965016YAF

## SPANISH STONE


4Color: White, Light Grey, Dark Grey, Moka  
Surface: matt  
Available size: 600 × 600 × 10  
Modulus of Rupture: Minimum  $\geq 35\text{N/mm}^2$   
Static Coefficient of Friction: Dry:0,95 Wet:0,73  
Water Absorption:  $\leq 0,5\%$   
Breaking Strength:  $\geq 1300\text{N}$



WHITE



LIGHT GREY




MOKA



BLACK

## PIETRA

3 Color: White, Light Grey, Grey, Black  
Surface: matt, lapatto, full polished  
Available size: 600 × 600 × 10  
Modulus of Rupture: Minimum  $\geq 35\text{N/mm}^2$   
Static Coefficient of Friction: Dry:0,95 Wet:0,73  
Water Absorption:  $\leq 0,5\%$   
Breaking Strength:  $\geq 1300\text{N}$



WHITE



GREY



ASH



ANTRACITE