

KITO

KITO Beyond Your Imagination.

2015
NEW
COLLECTION

Guangdong KITO Ceramics Co., Ltd

Tel: +86-757-82533646

Fax: +86-757-82533866

E-mail: export@kito.cn

Website: www.kito.cn

B1, Ceramics International Trading Center ,
Jihua Western Rd, Foshan, Guangdong, P.R.C
Post code: 528061



KITO

Leading Glazed Tile Supplier

A top player specialized in top-grade glaze porcelain tiles production with more than 39 years experience.

R & D Center

*More than 120 engineers and professors,
43 types of technology and product patents.*

TQC System

In accordance with CE(EN14411:2012) standard.

Products range

Size: 100x100 mm to 600x1200 mm.

Thickness: 4.8mm to 20mm

Surface: full polished, lappato, matt and rough finish.

Technique: silk printing, roto printing, inkjet printing



CONTENTS

CEMENT — 01

WHITE MARBLE TILES — 03

SUGAR EFFECT — 05

TIMBER — 07

MARBLE TILES — 09

SPANISH STONE — 11

PIETRA — 12

01 KITO 2015
NEW COLLECTION



CEMENT

Surface: matt

Available size: 1200×600×12.5,

800×800×11.5, 800×800×20, 600×600×10, 600×600×20

Modulus of Rupture: Minimum $\geq 35\text{N/mm}^2$

Static Coefficient of Friction: Dry:0.95 Wet:0.73



Water Absorption: $\leq 0.5\%$

Breaking Strength: $\geq 1300\text{N}$




CITY

4 Colour: Off white, Beige, Grey, Black

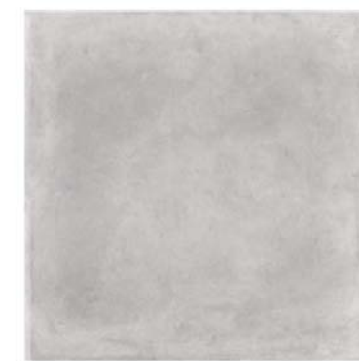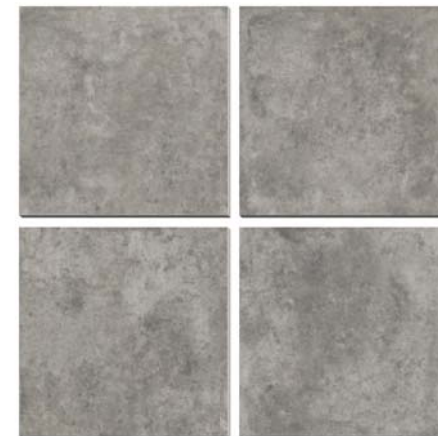


WEATHERED CONCRETE

3 Color: Off white, Grey, Black

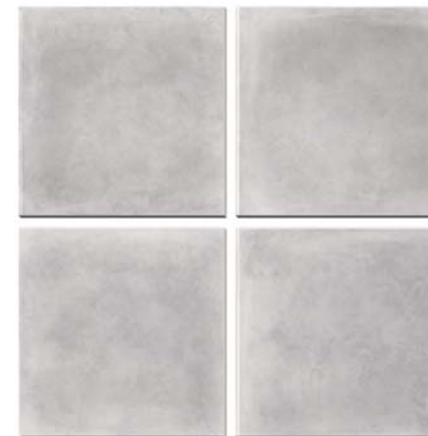

CONCRETE

4 Color: Off white, Beige, Grey, Black

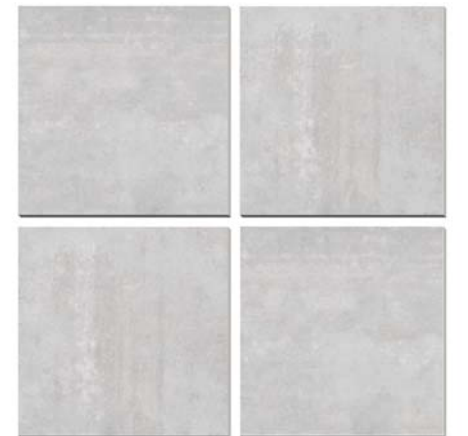

03 KITO 2015
NEW COLLECTION



WHITE MARBLE TILES

Color: White

2 surface: matt, polished


Available size: 800 × 800 × 11.5, 600 × 600 × 10

Modulus of Rupture: Minimum $\geq 35\text{N/mm}^2$

Static Coefficient of Friction: Dry: 0.95 Wet: 0.73

Water Absorption: $\leq 0.5\%$

Breaking Strength: $\geq 1300\text{N}$

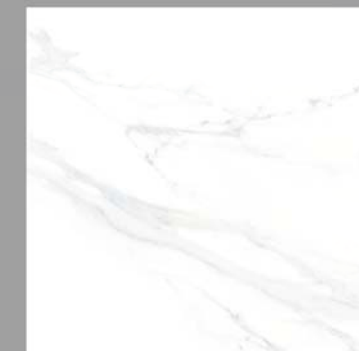

K0605020YAF



K0605019YAF





SUGAR EFFECT

2 Color: White, Beige

Surface: lapatto

Available size: 800 × 800 × 11.5, 600 × 600 × 10

Modulus of Rupture: Minimum $\geq 35\text{N/mm}^2$

Static Coefficient of Friction: Dry: 0.95 Wet: 0.73

Water Absorption: $\leq 0.5\%$

Breaking Strength: $\geq 1300\text{N}$



K0803335DAP



K0803337DAP

DECOR



SW200-1A



SW200-2A



SW200-3A



SW200-4A



SW200-5A



SW200-6A



SW200-7A



3337DH

TIMBER

3 Color: Light Grey, Beige, Brown
Surface: matt
Available size: 1200×200×12.5, 900×600×11.5, 900×150×11.5
Modulus of Rupture: Minimum $\geq$ 35N/mm²
Static Coefficient of Friction: Dry:0.95 Wet:0.73
Water Absorption: $\leq$ 0.5%
Breaking Strength: $\geq$ 1300N

SILVER WOOD



K1223230MA 1200×200×12.5

OAK



K122885MA 1200×200×12.5

NATURE WOOD



K122886MA 1200×200×12.5

WILD WARM WOOD



K122880MA 1200×200×12.5

BIRCH FOREST



K1223225MA 1200×200×12.5

SLOOPHOUT



K1223227MA 1200×200×12.5


DECOR

3 different patterns



K122880MH 1200×200×12.5

3 different patterns

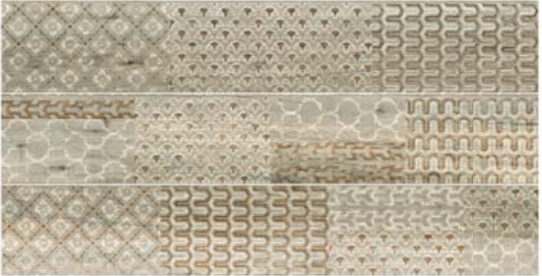

K1223225MH 1200×200×12.5

3 different patterns



K1223227MH 1200×200×12.5



MARBLE TILES

3 Color: White, Light Grey, Beige

Surface: Full polished

Available size: 900 × 600 × 11.5, 600 × 600 × 10

Modulus of Rupture: Minimum $\geq 35\text{N/mm}^2$

Static Coefficient of Friction: Dry: 0.95 Wet: 0.73

Water Absorption: $\leq 0.5\%$

Breaking Strength: $\geq 1300\text{N}$

SIMMI




K0965001YAF

ATHENS WOODEN



K0965002YAF

MEXICAN WHITE

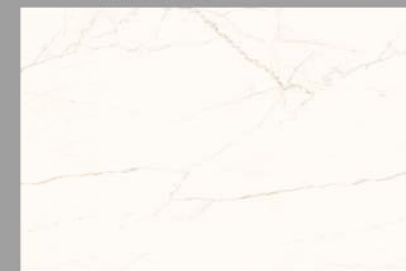


K0965013YAF

ITALY WOODEN



K0965014YAF


ARMAN STONE

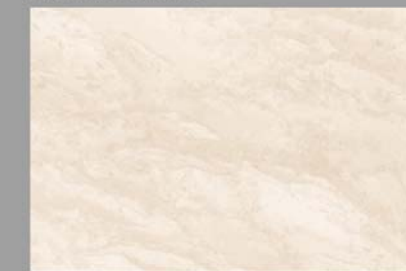

K0965016YAF

SPANISH STONE


4Color: White, Light Grey, Dark Grey, Moka
Surface: matt
Available size: 600 × 600 × 10
Modulus of Rupture: Minimum $\geq 35\text{N/mm}^2$
Static Coefficient of Friction: Dry:0.95 Wet:0.73
Water Absorption: $\leq 0.5\%$
Breaking Strength: $\geq 1300\text{N}$

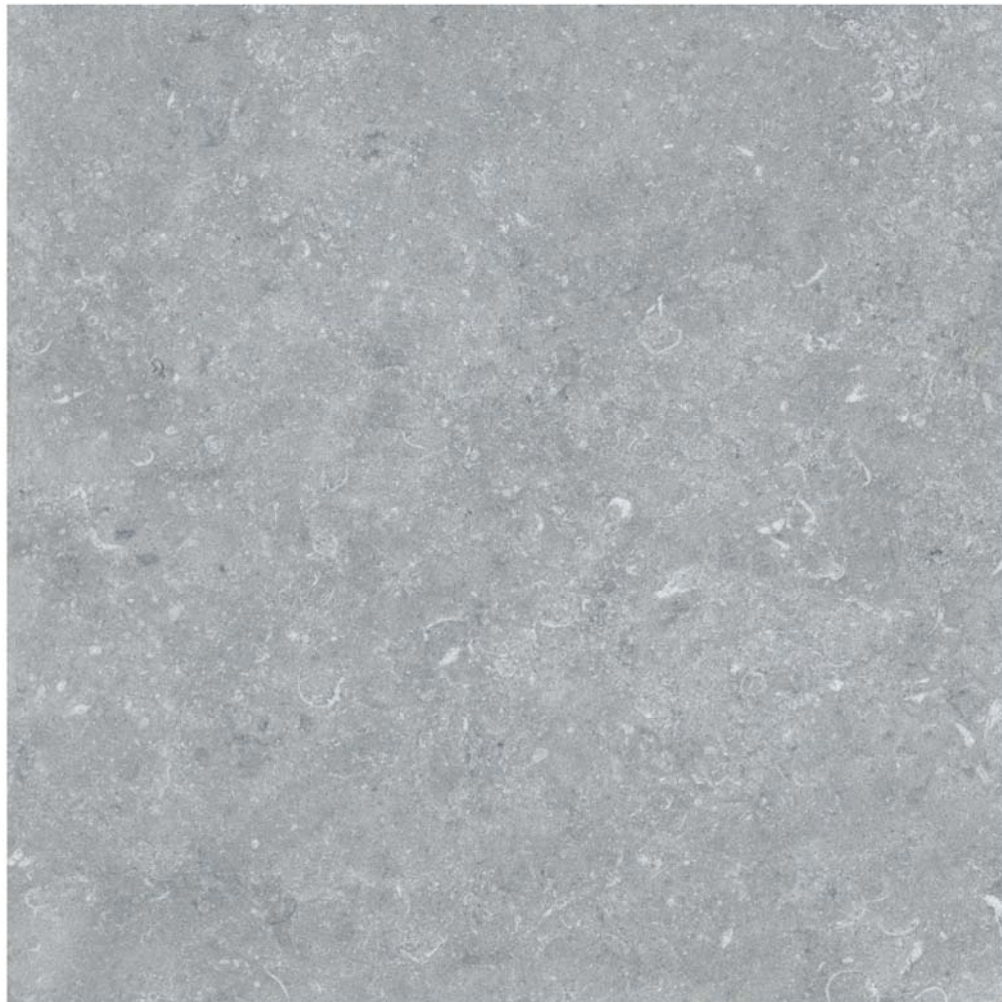

WHITE



LIGHT GREY



MOKA



BLACK



PIETRA

3 Color: White, Light Grey, Grey, Black
Surface: matt, lapatto, full polished
Available size: 600 × 600 × 10
Modulus of Rupture: Minimum $\geq 35\text{N/mm}^2$
Static Coefficient of Friction: Dry:0.95 Wet:0.73
Water Absorption: $\leq 0.5\%$
Breaking Strength: $\geq 1300\text{N}$



WHITE



GREY



ASH



ANTRACITE